

26.07.2018
YOL KEŞFİ / ROAD SURVEY
ZEYTİNDAG-ŞANTİYE ALANI /
ZEYTINDAG- SITE AREA

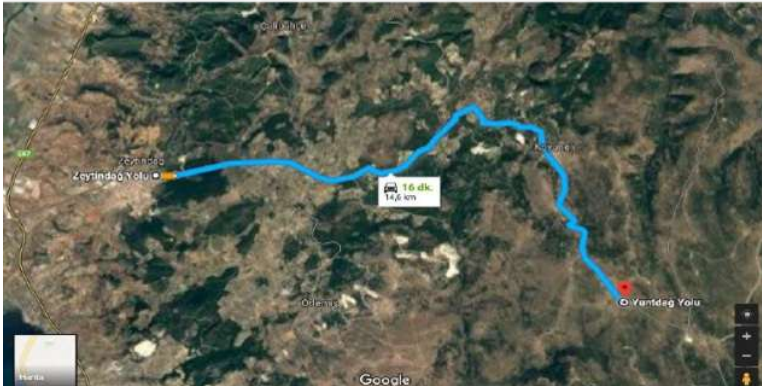


Figure 1. Route engineering study identifying the transportation corridor between the blade storage area and the wind farm site. The survey was undertaken to assess horizontal curves, road widths and geometric constraints to determine the required transportation method.



Figure 2. Wind turbine blade secured on the blade lifter transport system following completion of the route assessment. The selected transport configuration enabled the 65.5 m blade to safely negotiate constrained horizontal curves identified during the engineering review.

Engineering decisions demonstrated

- Route survey undertaken before transport.
- Horizontal curve geometry reviewed.
- Blade lifter selected instead of conventional trailer.
- Transportation risks reduced without permanent road widening.

The route engineering study identified several constrained horizontal curves that could not be negotiated safely using a conventional blade trailer. Based on the engineering assessment, a blade lifter transport system was selected to rotate the 65.5 m blade, minimize temporary road modifications and reduce transportation risk.